

CODE	INPUT	OUTPUT VOLTAGE	OUTPUT CURRENT	DIP #1	DIP #2	DIP #3	DIP #4	DIP #5	Typ. PF	Typ. EFF.	Typ. THD
42683	200-240V	14-42V	1100mA	ON	ON	ON	ON	-	0,95	87,5%	< 10%
			1050mA	-	ON	ON	ON	-	0,95	87,5%	< 10%
			1000mA	ON	-	ON	ON	-	0,95	87,5%	< 10%
			950mA	-	-	ON	ON	-	0,95	87,5%	< 10%
			900mA	-	ON	ON	-	-	0,95	87,5%	< 10%
			850mA	ON	-	ON	-	-	0,95	87,0%	< 10%
			800mA	-	-	ON	-	-	0,90	87,0%	< 10%
			750mA	-	ON	-	-	-	0,90	87,0%	< 10%
			700mA	ON	-	-	-	-	0,90	86,5%	< 10%
42684	200-240V	14-42V	650mA	-	-	-	-	-	0,90	86,5%	< 10%
			600mA	ON	-	ON	ON	-	0,95	87,5%	< 10%
			550mA	-	-	ON	ON	-	0,95	87,5%	< 10%
			500mA	-	ON	ON	-	-	0,95	87,5%	< 10%
			450mA	ON	-	ON	-	-	0,95	87,0%	< 10%
			400mA	-	-	ON	-	-	0,90	87,0%	< 10%
			350mA	-	ON	-	-	-	0,90	87,0%	< 10%
			300mA	ON	-	-	-	-	0,90	86,5%	< 10%
			250mA	-	-	-	-	-	0,90	86,5%	< 10%

One4all: including DALI-2, PUSH-DIM, 0-10V, 10V PWM dimming; also, corridor FUNCTION available. 4 DIP switches for output current or corridorFUNCTION adjust. Flicker free when taking phone, or in CCTV monitor.


FEATURES & BENEFITS

- DALI member, compatible with universal DALI masters
- Tested in DALI house according to IEC 62386 parts 101,102(DALI-2), 207
- Adjustable constant current output
- Reliable, Class II, SELV according EN 61347
- Independent and with strain-relief
- Permissible AC cable 0.5-1.5mm² wire gauge, 3.5-8mm PVC jacket diameter
- All terminals are screw-less, easy and quick for installation
- One cable relief struction design,only need one time screw lock
- Working Ta=-25°C ~ +45°C
- 50,000 hrs nominal lifespan
- 5-year factory guarantee
- Flicker Free
- Built-in active PFC


FUNCTIONS

- Over current protection
- Over voltage protection
- Over temperature protection
- Over load protection
- Short-circuit protection
- No-load protection

Wiring diagram for PUSH DIM

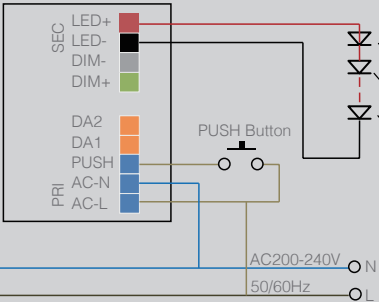

Wiring diagram for DALI

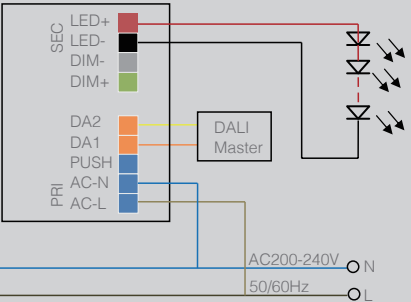

Wiring diagram for 0-10V, or 10V PWM

